

Clamco 250C Combo

Dependable seal and shrink system

The Clamco 250C Combo Shrink Wrap System combines an L-bar sealer with a shrink tunnel in one robust, compact unit. The 250C features a motorized closing seal bar arm that improves both operator ergonomics as well as production output. The power take-away conveyor quickly transitions product from the sealer to the tunnel. The high flow 6,000 watt tunnel is ideal for effectively shrink wrapping a range of products at a rate of up to 12 packs/min. The 250C Combo Series includes standard features and unique advantages not found on competitive systems in the same class.



L-Bar Sealer Features


- 17" x 23" seal area for shrink wrapping a range of product sizes
- Heavy-duty seal arm with motorized closing – push button or auto pace modes
- Quick height adjustment facilitates centering the seal on the product
- Heated seal blade for long-lasting performance and easy replacement
- Adjustable seal power provides high seal repeatability
- Designed to work with polyolefin up to 150 gauge and PVC up to 100 gauge

Shrink Tunnel Features

- Tunnel chamber size: 16" W x 22" L x 9" H
- 6,000 watt tunnel heating power provides high performance
- Digitally-controlled tunnel temperature for superior consistency
- Heavy-duty blower with adjustable velocity and flow for optimized performance



Seal arm with motorized closing—push button or auto pace modes



Exit roller conveyor with removable stop so product can go onto another conveyor



Trim take-up wheel neatly winds trim (optional)

Shrink Tunnel Features cont'd.

- Tunnel conveyor with variable speed and live rollers (1.25" spacing) for a better shrink result
- Insulated tunnel design minimizes heat loss and maintains temperature consistency

Operating Features

- User-friendly operator controls for fast, easy and repeatable setup
- Film cradle can accommodate up to 20" wide centerfold film
- Pinwheel perforator wheels for rapid air escape that results in excellent shrink
- 20" long roller outfeed conveyor for package transfer at the end of the process
- Robust design with welded steel frame and 33" operating height



a PAC Machinery company

Clamco 250C Combo

Ideal shrink wrap system for packaging a variety of products!



Shrink Packaging



Multi-packs



Unique shapes



Spill Containment



Re-packaging



Tamper Evident Protection

Specifications


Model	250C Combo
Seal Length (end)	16"
Seal Length (side)	23"
Film Width (max)	20" Centerfold
Tunnel Inside Length	22"L
Tunnel Opening	16"W x 9"H
Overall Dimensions	106"L x 38"W x 50"H
Tunnel Wattage	6,000 Watts
Electrical	220V, 50 amps, 1 phase
Shipping Dimensions	92"L x 38"W X 50"H
Shipping Wt. (approx.)	1,650 lbs

Safety Features

- Seal arm obstruction detection for ensured operator safety
- Automatic cool down for maximum component reliability
- Quick access to the entire electrical cabinet for easy troubleshooting
- Designed to meet CE requirements
- Locking casters for safe, stable operation
- Emergency stop button

L-Bar Options—250C Combo

Trim Take-up Wheel—Rewinds trim to keep work area neat.
Service Parts Kit

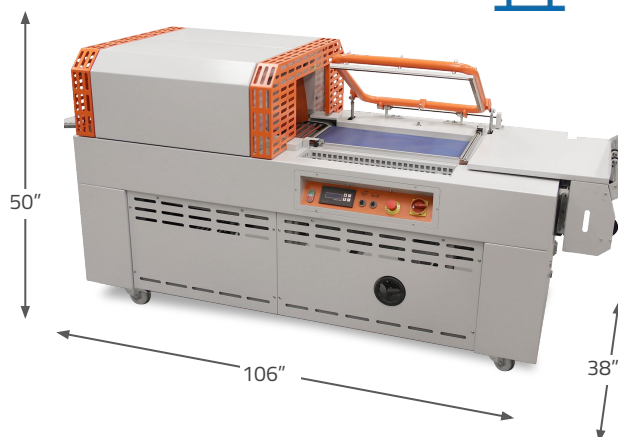

Contact us today:

1 (800) 985-9570 ■ sales@pacmachinery.com



a PAC Machinery company

775 Berea Industrial Parkway, Berea OH 44017 ■ 1 (800) 985-9570 ■ pacmachinery.com

Specifications subject to change without notice